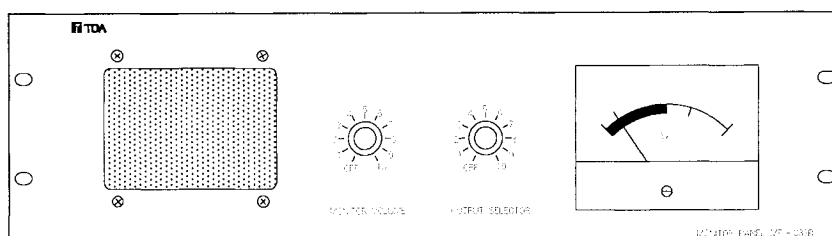


**MONITOR PANEL**
**MP-032B**

**GENERAL DESCRIPTION**

The MP-032B is designed to provide aural and visual monitoring for the outputs of up to 10 power amplifiers. It includes a 5" monitor speaker, a volume control, a watt meter, and a 11-position (OFF and 10 channels) selector switch. The unit also furnished with a line voltage selector on the rear panel to allow monitoring of 25, 50, 70, and 100-volt line outputs.

**FEATURES**

1. Monitoring up to 10 channels.
2. Aural and visual monitoring.
3. Monitors 25, 50, 70, and 100-volt lines.
4. Compact, space-saving construction.

**SPECIFICATIONS**

Functions	Visual / aural monitoring (up to 10 power amplifiers)
Controls	Channel selector switch x 1 Monitor volume control x 1 Watt meter x 1 Line voltage selector switch x 1
Speaker	Full-range 5" speaker
Input line voltage	25 V (625 $\Omega$ )/50 V (2500 $\Omega$ )/70 V (5000 $\Omega$ )/100 V (10,000 $\Omega$ ) switchable
Terminals	Screw terminals
Dimensions in mm (in.)	133 (5.2) H x 483 (19.0) W x 62 (2.4) D
Weight	2.2kg (4.85 lb.)
Finish	Black